


LINEA
15400



ANETA
LIGHTING
LIGHTS FOR HOME AND WORK SINCE 1947

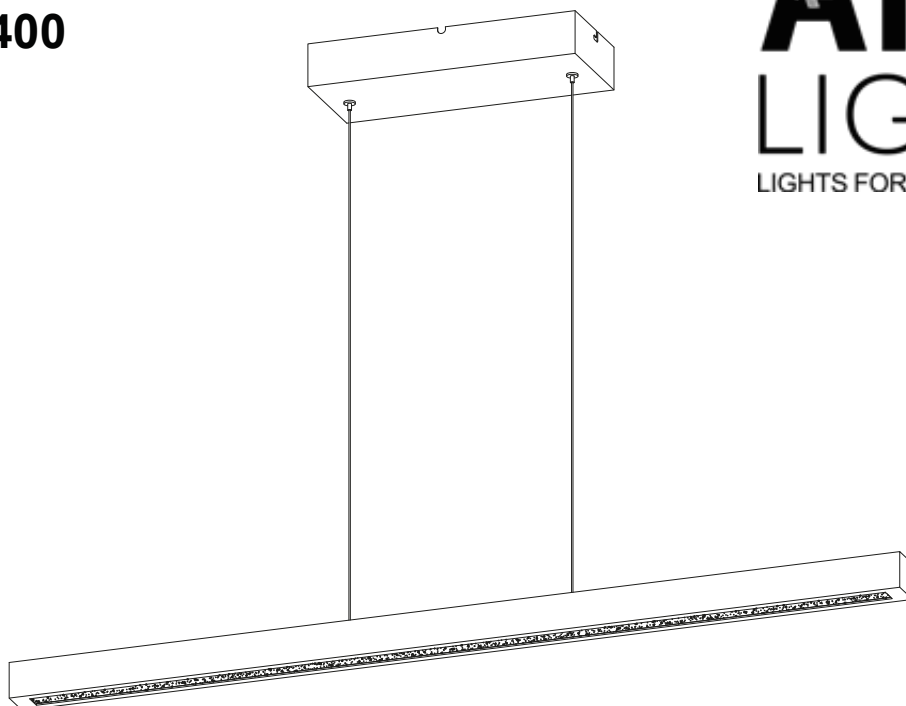


aneta.se
aneta.no




aneta_lighting


Krok / lampeuttak
Krok / lampputtag
Krokku / valaisinpistorasia
Hook / Lamp socket

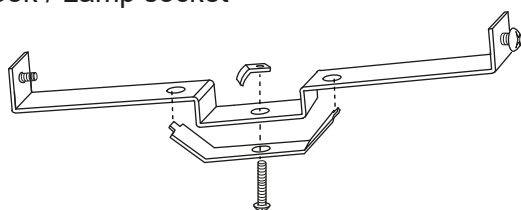

1

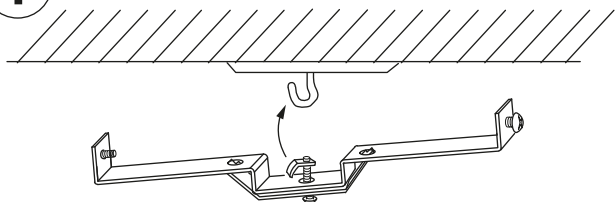


2

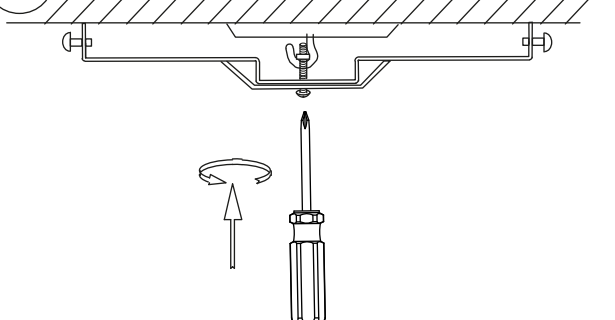


Takboks
Takdosa

Kattorasia
Ceiling installation box

1

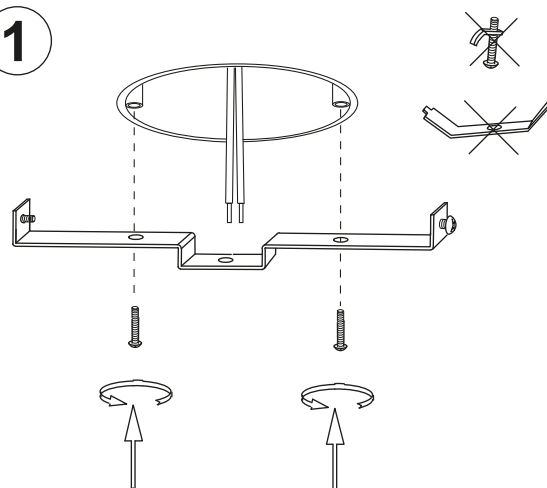


2

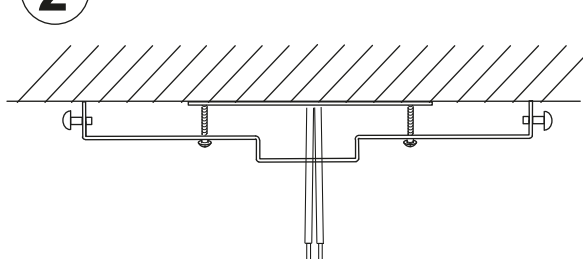


Lamppropp med kabel (medföljer ej)
Lampestøpsel med ledning (ikke inkludert)
Valaisinpistotulppa johdolla (ei sis.)
Lamp plug with cable (not included)

KL.II - ujordet / ojordad / maadoittamaton / unearthed

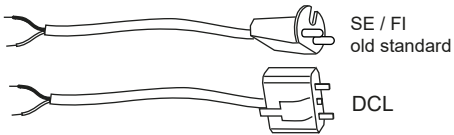


3

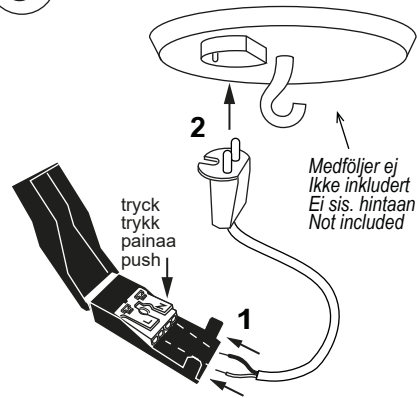


Inkoppling direkt till strömkablar
Installasjon direkt till strømkabler
Kytetään suoraan
Installation directly to supply cable



3

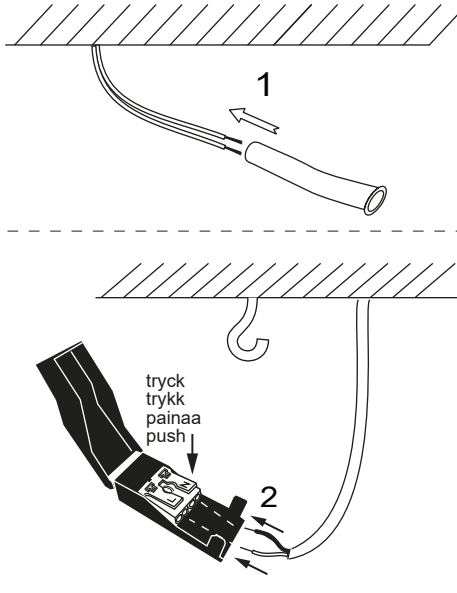

4

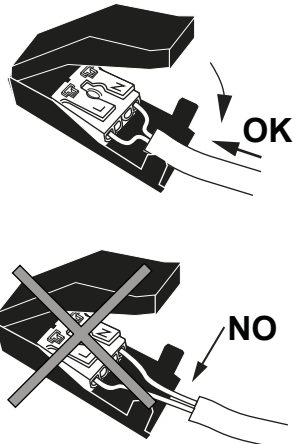

Justere høyden
Justera höjden
Säädä korkeus
Height adjustment

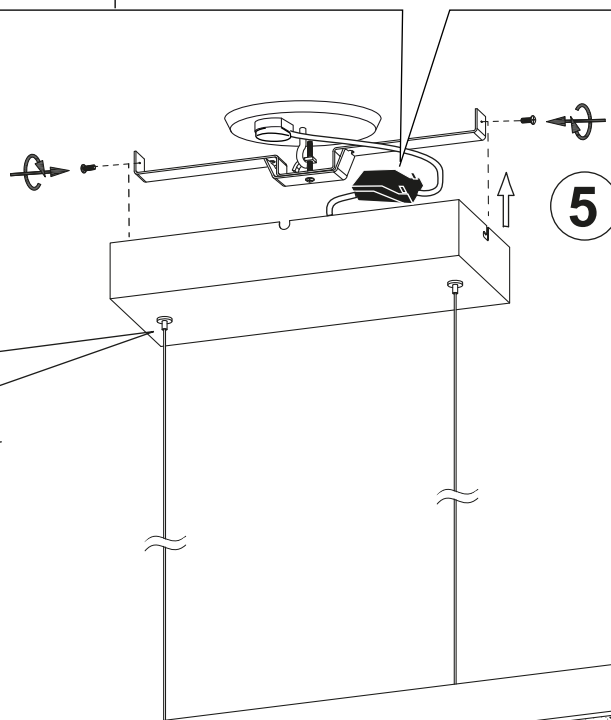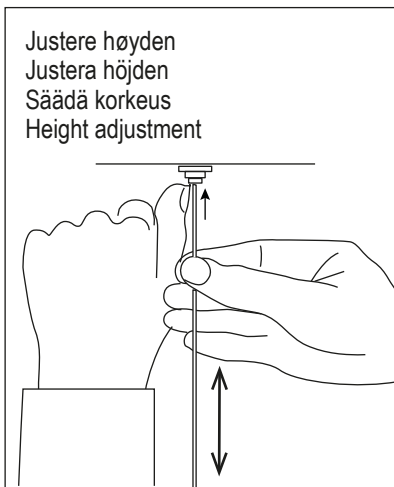

SE: Rengöring:
Torkas med torr trasa.
NO: Rengjøring:
Tørkes av med tørr klut.
FI: Puhdistus:
Pyyhi kuivalla liinalla.
EN: Cleaning:
Wipe with a dry cloth.

SE: Denna produkt innehåller två ljuskällor med energieffektivitetsklass E.
Lysdioderna är utbytbara som reservdelar. 50000 tim ≈ 20 år (6 tim/dag)
NO: Dette produktet inneholder to lyskilder med energieffektivitetsklasse E.
Diodelyskilderne kan skiftes som reservdeler. 50000 tim ≈ 20 år (6 tim/dag)

FI: Tämä tuote sisältää kaksi valonlähdetä, joiden energiatehokkuusluokka on E.
LED valolähde vaihdetta vissa, löytyy varaosana. 50 000 tuntia ≈ 20 vuotta (6 t/päivä)
EN: This product contains two light sources of energy efficiency class E.
The LED-chips are exchangeable as a spare part. 50000 h ≈ 20 years (6 h/day)

Light Source specifications :			
Lighting technology used:	LED	High luminance:	no
Mains or non-mains:	non-mains	Anti-glare shield:	no
Directional or non-directional:	non-directional	Dimmable:	yes
Connected L.S.:	no	Energy consumption in on-mode:	22 kWh / 1000 h
Color-tuneable:	no	Energy efficiency class (A-G):	E
Envelope:	no	Useful luminous flux:	2645 lm
		CCT colour temperature:	3000 K
		On-mode power:	21,7 W
		Stand-by power:	0 W
		Networked standby power:	0 W
		CRI:	≥ 80
		R9 color rendering index:	50
		Chromaticity coordinates:	x:0.434, y:0.402
		SDCM:	< 6
		Lumen maintenance factor:	0.96
		Survival factor:	0.90
		Measures LxBxH:	960x18x2mm
		Supply current:	700 mA constant current

* The luminous flux above is the value for the bare light source in accordance with Regulation (EU) 2019/2015. The luminous flux for the lighting fitting is less, as the light is partly absorbed by the glare shield and parts of the fitting.